

**END ANCHORS ON WALL OR CEILING CONFIGURATION FOR SECUROPE HORIZONTAL**

**ANCRES TERMINALES CONFIGURATION AU MUR OU AU PLAFOND POUR SECUROPE HORIZONTAL**


**ANCLAJES FINALES PARA CONFIGURACIÓN A PARED O TECHO DE SECUROPE HORIZONTAL**

**ENDKONSOLEN AUSLEGUNG FÜR WAND-ODER ÜBERKOPFMONTAGE FÜR SECUROPE HORIZONTAL**

**Description:**

When the lifeline is installed between two vertical walls or attached to ceiling, models LDV053 and LDV054 are recommended. The end anchors are attached to the supporting structure by two M12 bolts. The end anchor consists of an anchor point type "Twinfix 2013" PTA016 provided with a crimping ring LDV 010.

The end anchor with absorber LDV 053 has, in addition to the anchor "Twinfix 2013", a shock absorber with a spring and a turnbuckle which allows adjustment of tension on the line.

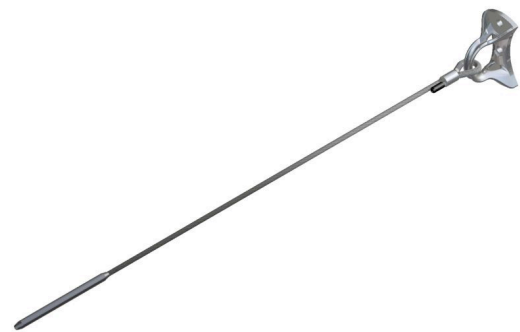

LDV 054 Simple anchor with LDV010

**Components:**

> LDV 054 End anchor, wall fixing fitted with a crimping ring. To be fixed on concrete wall with 2 M12 bolts.

> LDV 053: PTA016 Twinfix 2013 anchor point + LDV 032 absorber + Turnbuckle LDV 038



LDV 053 End Anchor with absorber and turnbuckle

**Compliant with EN 795 CLASS C**

Made in EU 

Test certificate n° AT6495704 

Code N°	Description	Weight	Lenght	Allowable force	Comments
LDV 054	End anchor SS316, wall fixing fitted with a crimping ring	0,708 kg	950 x 100 mm	12 KN	To be fixed on concrete wall with 2 bolts M12
LDV 053	End anchor SS316 wall fixing including energy absorber + turnbuckle	3,464 Kg	850 x 100 mm	12 KN	To be fixed on concrete wall with 2 anchors M12. Recommended for lifelines below 20 m in length



All the components for wall configuration must be used in conjunction with other original SecuRope parts.

Fallprotec S.A. 43-45, ZA Op Zaemer. L-4959 Bascharage. Luxembourg. T: +352 26 55 09 30,  
F: +352 26 55 09 30 55, marketing@fallprotec.com