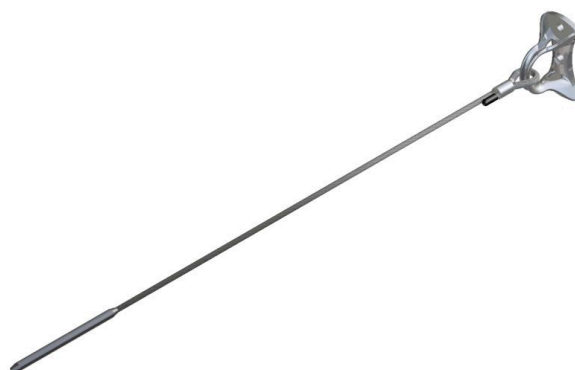


**SECUROPE NEO LIFELINE BETWEEN TWO WALLS OR ON CEILING**
**LIGNE DE VIE SECUROPE NEO ENTRE DEUX MURS OU AU PLAFOND**
**LÍNEA DE VIDA SECUROPE NEO ENTRE DOS MUROS O A TECHO**
**SECUROPE NEO ABSTURZSICHERUNG ZWISCHEN ZWEI WÄNDEN ODER ÜBERKOPF**
**Description:**

Flexible anchoring device Securope fixed between 2 walls or on ceiling, in accordance with EN 795 class C.

**Technical specifications:**

- > End and intermediate anchors Stainless Steel SS 316.
- > End anchors are bolted in concrete with 2 M12 bolts.
- > If the user is less than 3 m from the life line, 2 m absorbing lanyard, connects the user to the captive glider LDV060.
- > If the user is more than 3 meters from the life line, retractable fall arrest block connects the Securope trolley LDV093 to the user.


**Components:**


- > LDV 054 End anchor, wall fixing fitted with a crimping ring. To be fixed on concrete wall with 2 M12 bolts.

- > LDV 006 Cable Ø 8 mm construction 7 x 7 SS316

**Compliant with EN 795 CLASS C**

Made in EU 

Test certificate n° AT6495704 



Code N°	Description	Weight	Dimensions	Allowable force / Breaking	Comments
LDV 054	End anchor SS316, wall fixing fitted with a crimping ring	0,8 kg	515 x 80 mm	18,5 KN / 37 KN	To be fixed on concrete wall with 2 bolts M12
LDV 006	Cable Ø 8 mm construction SS316	0,3 Kg	7 x 7 mm	18,5 / 37 KN	5 m and +
LDV 043	NEO intermediate anchor Inox 316 with rotation axle and shear pin SS 316	0,42 Kg	100 x 60 mm	6 KN / 15 KN	One NEO anchor every 12 m per lifeline
LDV 060	Captive Glider	0,254 Kg	70 x 27 x 45 x 32 mm	6 / 12 KN	One per user
LDV 093	Trolley on bearings for wall or ceiling	1 Kg	115 x 95 x 36mm	6 / 12 KN	One per user
LDV 053	End anchor SS316 wall fixing including energy absorber + turnbuckle	3,4 Kg	820 x 80 mm	18,5 KN / 37 KN	To be fixed on concrete wall with 2 anchors M12. Recommended for lifelines below 20 m in length



All the components for wall and/or ceiling configuration must be used in conjunction with other original Securope parts.

Fallprotec S.A. 43-45, ZA Op Zaemer. L-4959 Bascharage. Luxembourg. T: +352 26 55 09 30,  
F: +352 26 55 09 30 55, marketing@fallprotec.com

> LDV 043 NEO anchor SS316: The guide cable is hinged on shaft supported by the base.

It has a rotational locking to prevent the anchor from pivoting when the cable is put under tension behind a curve.

The crimping zone is part of the intermediate anchor. It has Shearing pin.



> LDV 060 Captive glider: Captive on cable. Stainless Steel SS316 + carabiner, galvanised steel included.

> LDV 093 Trolley on bearings for wall or ceiling configuration. If user is below the line for more than 3 m or a block is attached to trolley EN795 C.



LDV060 Captive Glider LDV093 Trolley on bearings

> LDV 053 End anchor: Stainless Steel SS316 wall fixing including energy abs + turnbuckle.

To be fixed on concrete wall with 2 M12 bolts.



Securope NEO between two walls with captive glider

Securope NEO between two walls with Securope glider

