

FIXING ASSEMBLY ON CONCRETE SLAB - SECUROPE EVO

ENSEMBLE DE FIXATION SUR DALLE BÉTON - SECUROPE EVO

FIXIEREINHEIT AUF BETONPLATE - SECUROPE EVO

MONTAJE FIJO EN LOSA DE CONCRETO - SECUROPE EVO

The post LDV079 withstands a force of 6 kN without permanent deformation. This post has been developed to set intermediate anchors for straight Securope EVO Life line. A safe and inexpensive solution. It consists of 4 parts:

- > The post LDV079 in hot dip galvanized steel.
- > The LDV083 EVO intermediate anchor SS316 (to be installed on LDV079 and LDV 097 posts only).
- > The LDV082 Waterproofing collar.
- > An insulating mat rubber LDV058 located below the post base plate (optional).

Anchors are Yixed to the top of the post with a M12 bolt Yitted with a washer, a gasket and a cap nut. The mounting of the anchors on the posts is made in the factory, in order to ensure a proper sealing.



Technical specification:

Comes with an installer and user manual.

Material: Hot dip galvanized steel and SS304 for the collar

KN Intermediate anchor + post 6 KN


KN Intermediate anchor + post > 12 KN

 7,792 Kg

Compliant with 795 CLASS C

MADE IN EU 

Test Certificate n° AT6495704

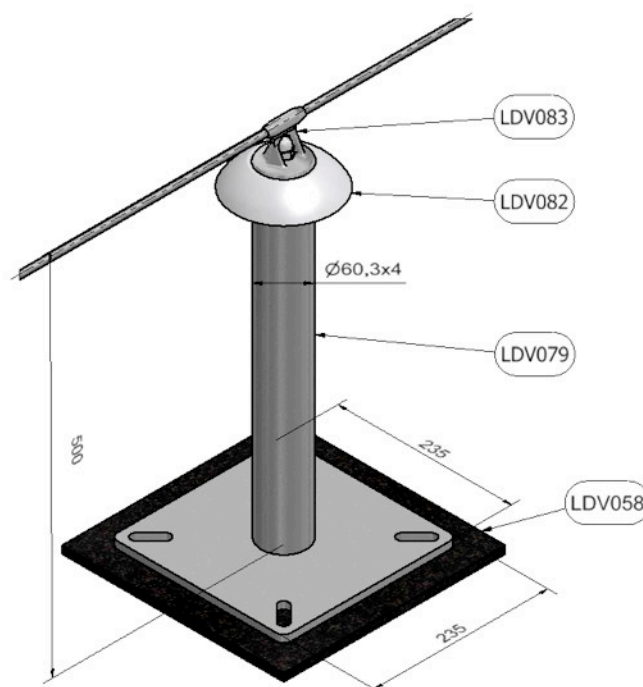

The post LDV097 withstands a force of 12 kN without permanent deformation. This post has been designed to set end anchor and 2 intermediate anchors on a corner plate LDV096. It consists of 5 parts:

- > The post LDV097 in hot dip galvanized steel.
- > The LDV002 end anchor.
- > The LDV082 Waterproofing collar.
- > The LDV083 EVO intermediate anchor.
- > The LDV096 corner plate.

An insulating mat rubber LDV058 located below the post base plate (optional)

Technical specification:

Comes with an installer manual.

Material: Hot dip galvanized steel and SS304 for the collar




End anchor + post 12 KN




End anchor + post > 24 KN



9,0 Kg

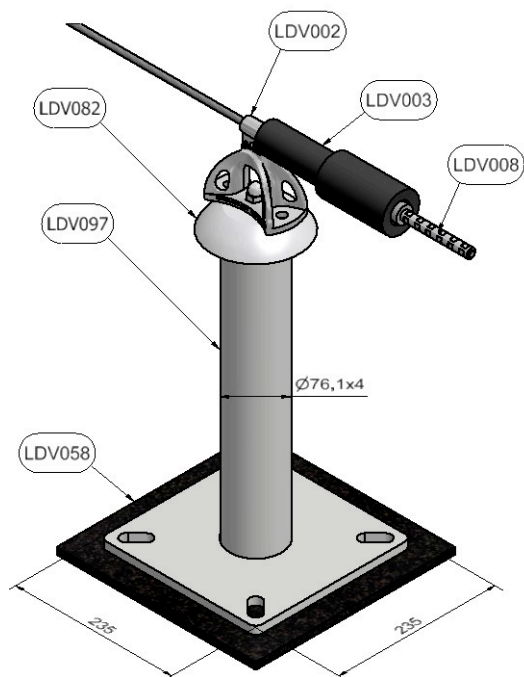


End anchor configuration

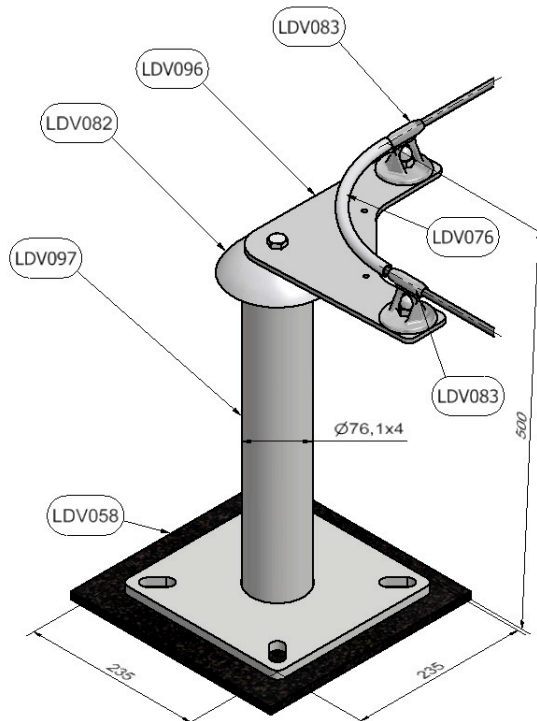

Curve Configuration

Typical Configuration of Securope EVO Life line

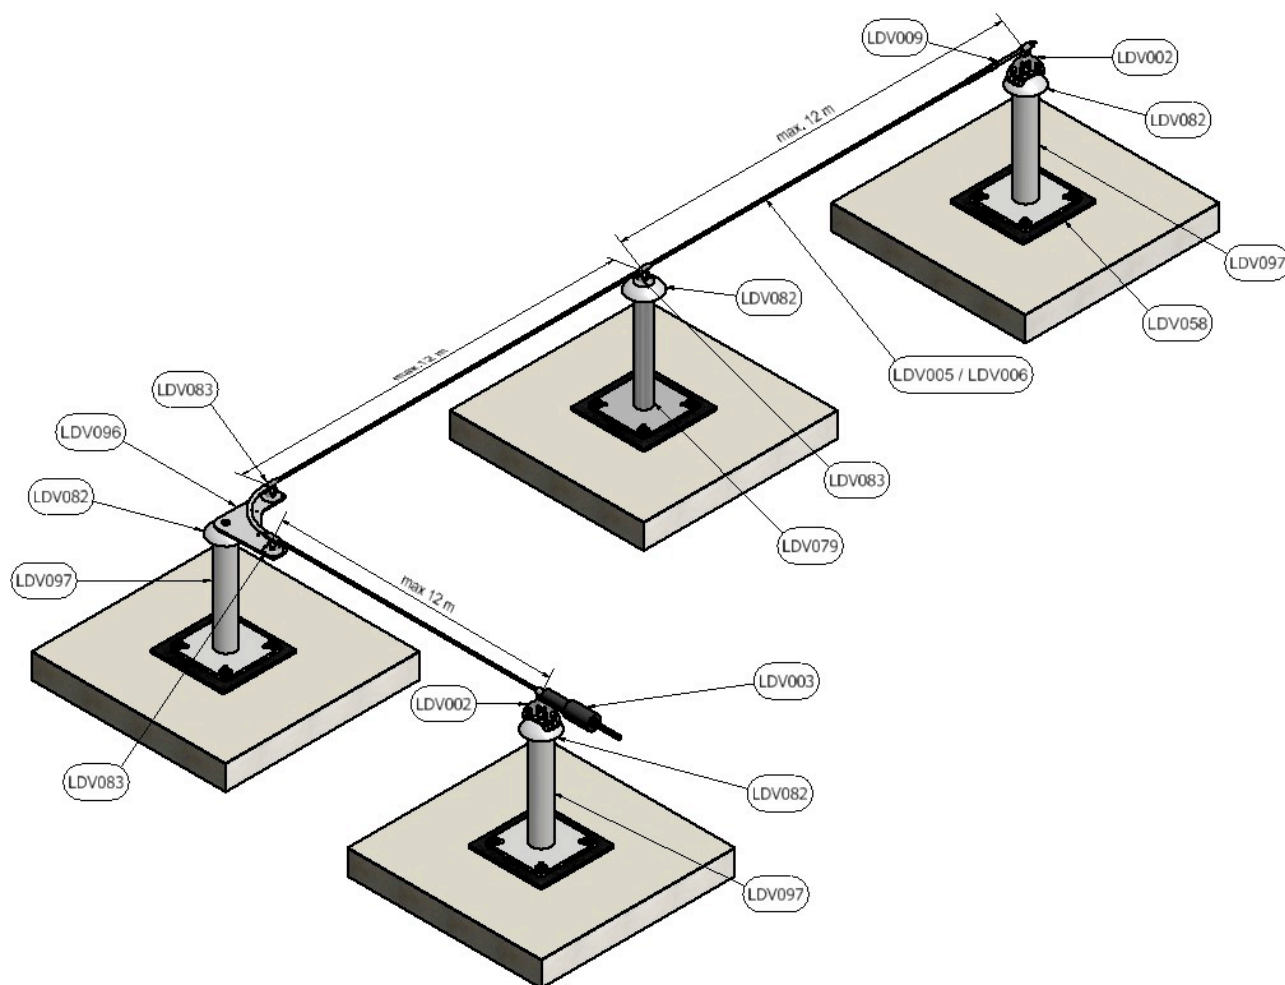

Code N°	Weight	Description	Availability
LDV079	7,3 Kg	Hot deep galvanised post height 50 cm for intermediate anchor EVO and anchor point LDV029	Available from stock
LDV083	0,196 Kg	EVO intermediate anchor SS316	Available from stock
LDV082	0,076 Kg	Waterproofing collar for LDV079 / LDV097	Available from stock
LDV058	0,52 Kg	Roofmate 30x30x1 cm rubber	Available from stock
LDV097	8 Kg	Hot deep galvanised post height 50 cm for end anchor and curves	Available from stock
LDV002	0,67 Kg	End anchor SS316	Available from stock
LDV003	0,455 kg	Energy Absorber synthetic material SS304	Available from stock
LDV008	0,061 kg	Crimping ring length 100 mm SS304	Available from stock
LDV096	1,6 kg	Corner plate for post hot deep galvanised	Available from stock
LDV076	0,1 kg	Cable guide for curve	Available from stock



Must be installed with LDV002 end anchor and LDV003 shock absorber. Can only be installed on concrete roofs, solution not applicable for conjurated or fragile roofs.