

ANCHOR RING TWINFIX 2013
L'ANNEAU D'ANCRAGE TWINFIX 2013
TWINFIX ANKERPUNKT 2013
PUNTO BI-ANCLAJE TWINFIX 2013

Description:

The anchor ring Twinfix 2013 is permanently installed on a building or other structure to maintain people who are at risk of falling when carrying out maintenance work.

Fixing with 2 x M12 bolts in concrete.

Fixing with 1 x M12 bolt in structural steel beam. Anchor point for two users.

Opening max. for connector = 58 x 48 mm




Technical specification:


Comes with an installer and user manual.

Material: Stainless steel molded AISI316

KN 25 KN
KN >50 KN
Ø 13 mm
kg 0,520

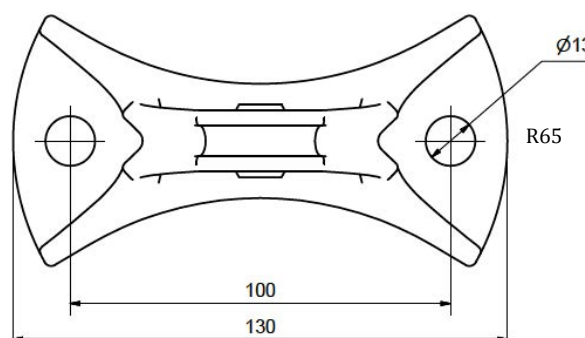

Compliant with EN 795 CLASS A1
MADE IN EU 

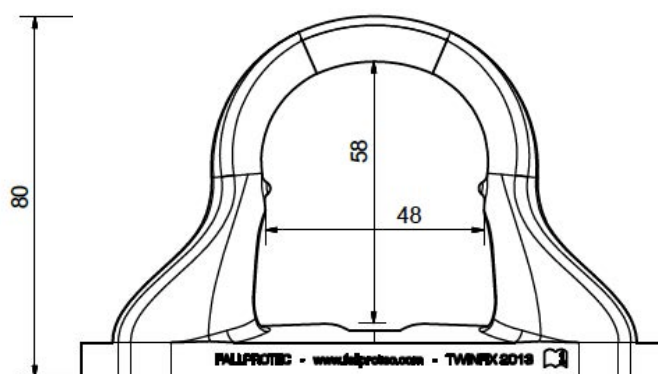

Code N°	Length	Availability
PTA 016	130 x 80 x R65 mm	Available from stock



For installations ensure that concrete quality must be at least 25 MPa. A single user connected to the anchor point has a working range within 2 m.

Fallprotec S.A. 43-45, ZA Op Zaemer. L-4959 Bascharage. Luxembourg. T: +352 26 55 09 30, F: +352 26 55 09 30 55, marketing@fallprotec.com