

SWITCHES AND THEIR FIXING ASSEMBLIES FOR SECUROPE HORIZONTAL

AIGUILLAGE ET SES FIXATIONS POUR SECUROPE HORIZONTAL


WEICHE FÜR SECUROPE ABSTURZSICHERUNG

DESVÍOS Y SUS FIJACIONES EN CUBIERTAS PARA SECUROPE HORIZONTAL


Description:

The switching system was designed specifically for the Securope Lifeline. There can be four branches (crossing two lifelines) or three branches (intersection of three lifelines). The switch, in stainless steel, is equipped with various fixing assembly for concrete roof, steel deck roof and standing seam roof.

The glider is shifted to the center and then it can rotate up to 360°. A safety disc, mounted on springs, locks the glider on the lifeline and therefore cannot be removed unintentionally during rotation.

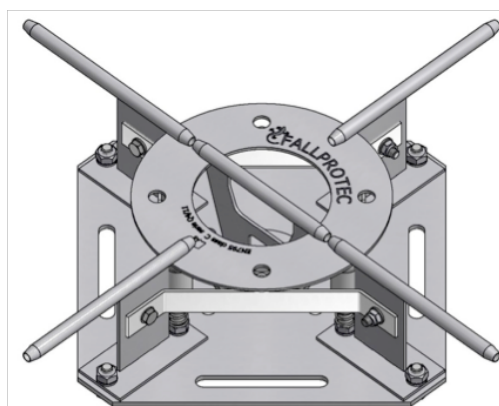

LDV050

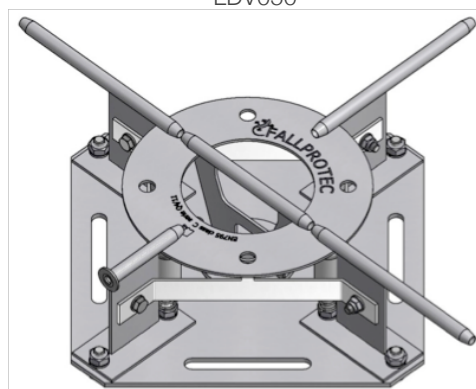

LDV048

Technical specification:

Delivered with an user manual.

Material: Stainless steel 304

Compliant with EN 795 CLASS C

Made in EU 


Test certificate n° AT6495704 

Code N°	Description	Weight	Allowable force	Comments
LDV 050	Four way switch	9,0 kg	10 KN	
LDV 048	Switch with 3 branches	8,5 Kg	10 KN	
LDV 028	Fixing assembly for standing seam without clamps	2,0 Kg	10 KN	1 per switch. Clamps must be ordered separately.
LDV 035	Fixing assembly for cold deck SS304	4,0 Kg	10 KN	1 per switch




All the switches must be used in conjunction with other original Securope components.

Fallprotec S.A. 43-45, ZA Op Zaemer. L-4959 Bascharage. Luxembourg. T: +352 26 55 09 30,
 F: +352 26 55 09 30 55, marketing@fallprotec.com

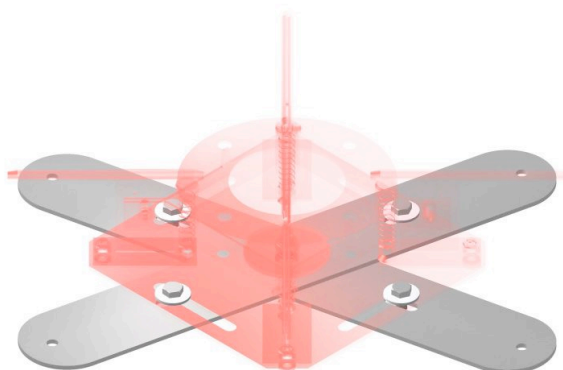

clamps) LDV 035 Fixing assembly for cold deck SS304

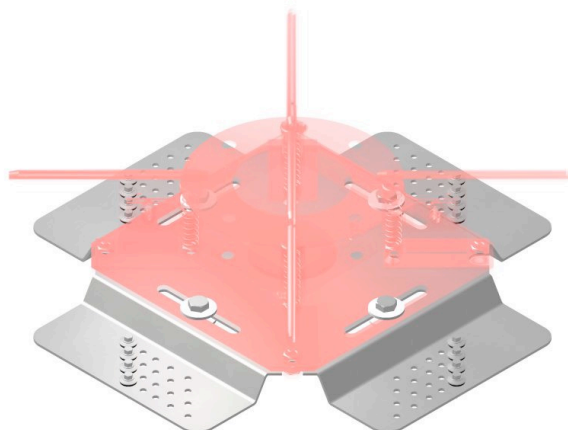

LDV 028 Fixing assembly on for standing seam (without

